



Nepal Development Society

Kathmandu M. P. C-04, Baluwatar, Bagmati, Nepal

Notice of Invitation for Bids

First Date of Publication: 2nd March, 2025 (2081/11/18)

Nepal Development Society (NDS), Kathmandu Metropolitan City-04, Baluwatar, Kathmandu, Bagmati, Nepal invites sealed tender under its **Community Development Project** from the reputed companies/forms for the **Construction of Community Health Post in Harinagar Rural Municipality-05, Basantpur (Kholapari), District Sunsari, Province Koshi**. The tender is valid until the completion of the construction project.

S. N.	Tender ID	Name of Project	Work Details	Project Location	Bid Validity Period	Project Amount	Bid Security Amount
1	NDS/CHP/02/614738	Community Development Project	Construction of Community Health Post	Harinagar R. M. -05, Basantpur, Sunsari Koshi	10 days	1,500,000/-	37,500/-
2	Deadline for Bid Submission:						
3	Bid Submission Charge:						
4	Bid Submission process:						
5	Date, Time and Place for Bid Opening:						
6	Account number for the Bid Security Deposit:						
7	Documents need to be submitted with BID:						

Free (documents can be downloaded for our official website:

<https://nepaldevelopmentsociety.org/download>

Bid documents can be sent at the provided Email ID ndstender.np@gmail.com by making RAR file or can be submitted directly by visiting to the NDS office.

12th March 2025 (2081/1/28) 05:00 pm at Office of the Nepal Development Society

Name of Bank: Machhapuchhre Bank Ltd.

A/C name: Nepal Development Society

A/C no.: 0130100877500013

Branch: Baluwatar

a. Copy of Company/form Registrations b. Tax clearance certificate of FY 2080/081

c. Copy of Vat registration certificate d. Work Permit documents/certificate

e. Work Experience certificate f. Copy of company/form Renew certificate.

g. Company/form verification letter of not being black listed by the GoN.

NOTES:

- If the last date of bid purchasing, submission and opening falls on government holiday, then the next day shall be considered as the last date.
- No action will be taken over the bid which comes after the submission date and time.
- If any company/form wants to deposit the bid security amount in cash then they can deposit the required amount in the above prescribed account and present the original voucher and also can present the 120 day's Bank Guarantee letter in the name of Nepal Development Society.
- Bid Security amount must be written both in number and words and if any differences found then written words will be accredited.
- The bid will be opened in the presence of the bidder or any representatives of the company/forms in the office premises of NDS. Even without the presence of any representatives also, the bid can be opened by NDS.
- The office reserves all the rights to accept or reject any or all bids without assigning reasons, whatsoever.





Nepal Development Society

Kathmandu M. P. C.-04, Baluwatar, Bagmati, Nepal

Form needs to be filled by the Bidder for the Construction of Community Health Post

A. Details of the Bidder Company/Form/Business:

a. Name of the Company, Forms, Business:	
b. Registration number of the company, forms, business:	
c. Registered location of the company, forms, business:	
d. Office Address of the company, forms, business:	
e. Name of the proprietor:	
f. Contact /mobile number of the proprietor:	
g. Bank Details of the company, forms, business:	
h. Details of the manpower of the company, forms, business:	

S. N.	Name/Surname	Designation	Qualification
1			
2			
3			
4			
5			

B. Submitted by

Signature:

Name:

Designation:

Date:

Stamp/Seal of the
Company

Note: All necessary documents as mentioned the BID Notice should be submitted compulsory along with this form. Company seal/stamp and authorized signature is necessary in each submitted documents. If the representative of the company is filling up the form for BID, then the authentic authorization written letter must be submitted with the documents.





Nepal Development Society

Kathmandu M. P. C.-04, Baluwatar, Bagmati, Nepal

Tender No: NDS/CHP/02/614738

Name of the Project: Community Development Project

Work Details: Construction of Community Health Post

Construction Place/Address: Harinagar Rural Municipality-05, Basantpur (Kholapari), District Sunsari, Province Koshi

Billing of Quantities


GROUND FLOOR BUILDING (596.75 Sq. ft.) & (55.46 Sqm.)

S. N.	Description	Total Quantity	Units	Rate/Unit NRs.	Amount NRs.
1	Site Clearance		1 Job		
2	Earth work excavation in foundation	42.07	m3		
3	Flat brick Soling	48.18	m2		
4	P.C.C. (1:3:6) on foundation	3.76	m3		
5	Brick Masonry work 1:6	11.27	m3		
6	R. C. C. (1:2:4) work	25.93	m3		
7	Wooden Form work	95.25	m2		
8	Steel reinforcement including	2529.02	Kg		
9	1st class brick masonry (1:4) in Superstructure	11.09	m3		
10	Sal wood Chauhath works	0.18	m3		
11	Paneled shutters work	4.02	m2		
12	Cement plaster work in ceiling 1:3	72.01	m2		
13	Cement sand plaster (1:4) work on wall	107.32	m2		
14	2-coat white washing over one coat	236.36	m2		
15	Grill work	5.25	m2		
16	2-coat Enamel Paint works	21.72	m2		
17	Flooring work				
	a) Earth filling	48.11	m3		
	b) Stone soiling	7.25	m3		
	c) P. C. C (1:3:6) work	3.29	m3		
	d) Cement Punning (1:1)	49.09	m2		



18	Verandah railing work all complete		9.06	Rm	
19	Parapet wall all complete		3.50	m3	
20	Electrification works all complete		1	Job	
21	Sanitary work all complete		1	Job	
Total					
Say					
In Words NRs: -					




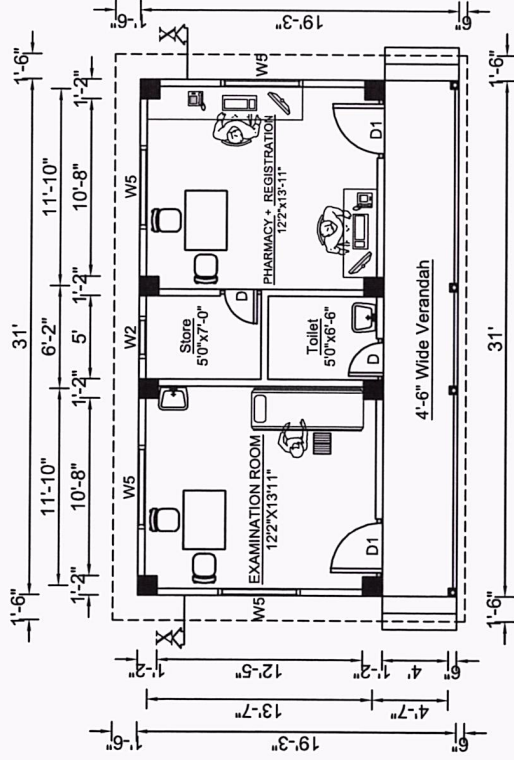

GROUND FLOOR PLAN

Plinth Area - 596.75 Sq.ft. / 55.46 Sqm.

Scale - 1"= 8'-0"

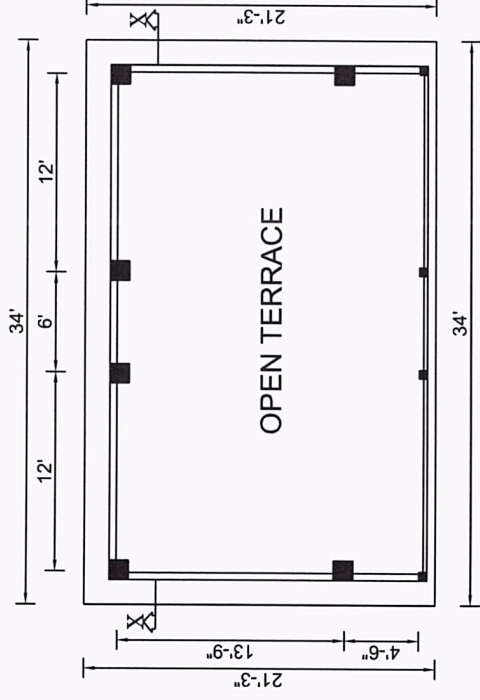

ROOF PLAN


Cover Area - 722.50 Sq.ft. / 55.46 Sqm.

Scale - 1"= 8'-0"


OPENING SCHEDULE

S.N	PARTICULAR	SYMBOL	WIDTH	HEIGHT
1	DOOR	D	2'-6"	7'-0"
2	DOOR	D1	3'-6"	7'-0"
3	WINDOWS	W2	2'-6"	3'-0"
4	WINDOWS	W5	5'-0"	4'-6"
5	VENTILATOR	W2	2'-6"	3'-0"





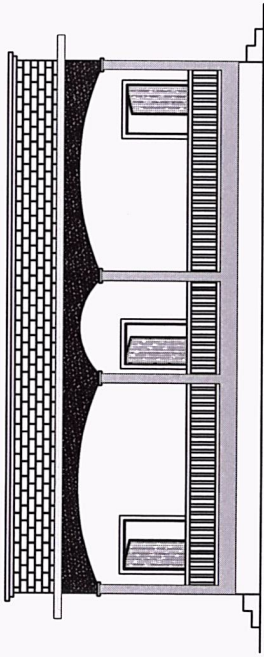


FRONT SIDE ELEVATION

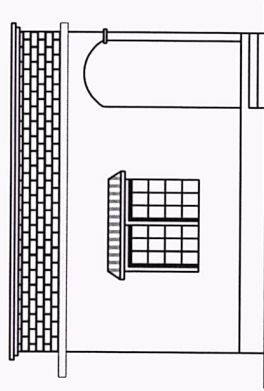

SIDE ELEVATION



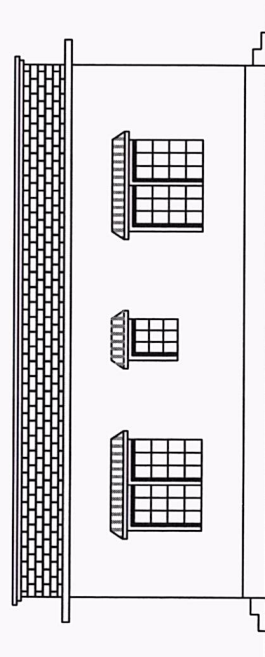
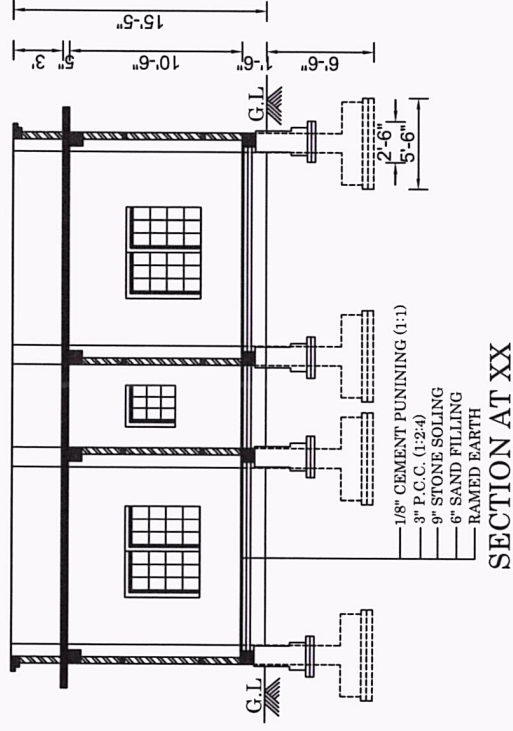







BACK SIDE ELEVATION

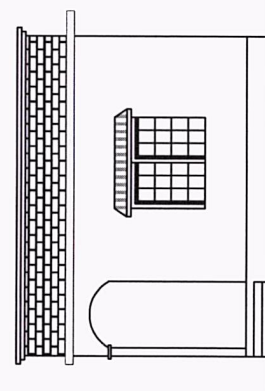

SIDE ELEVATION



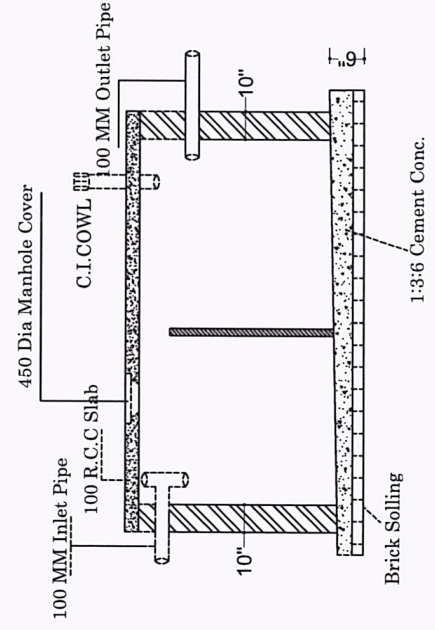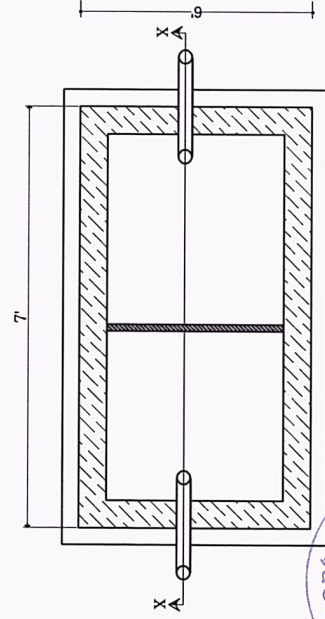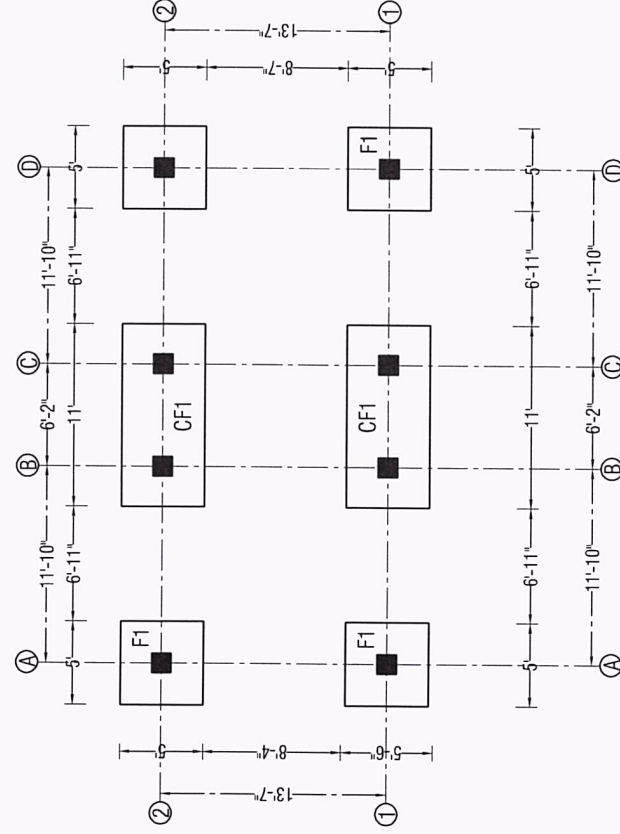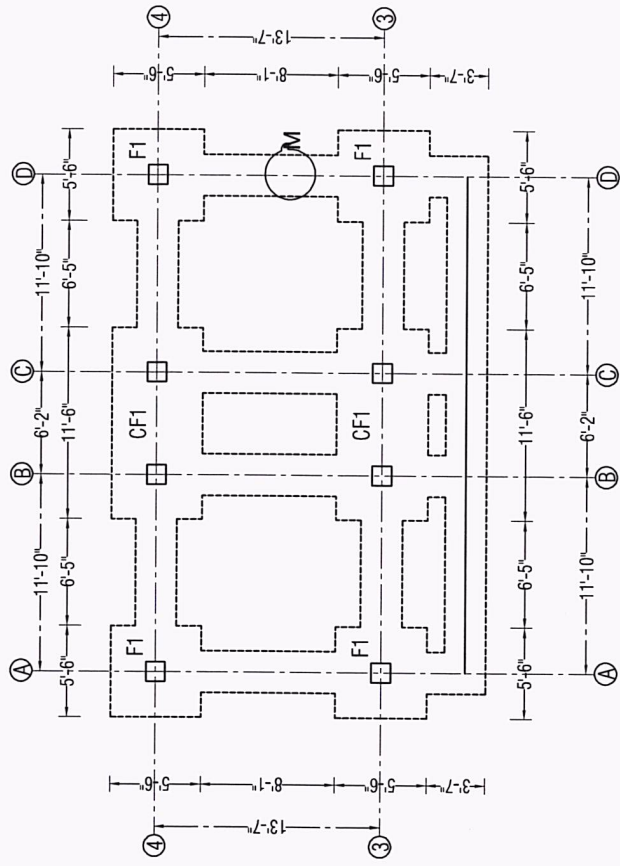

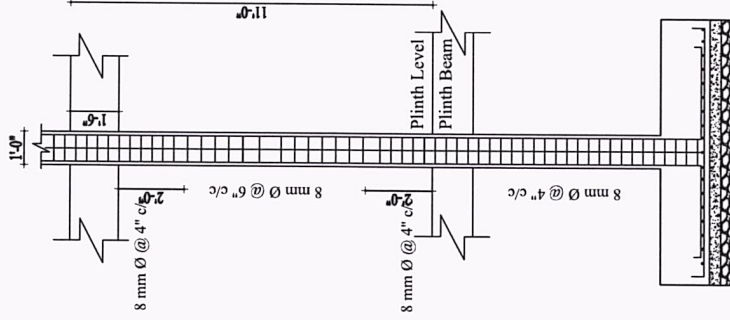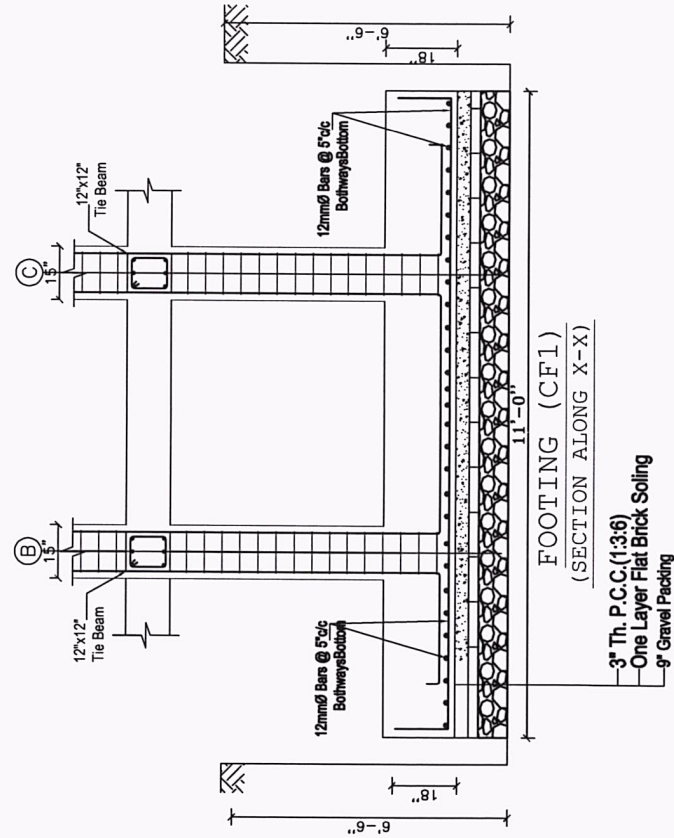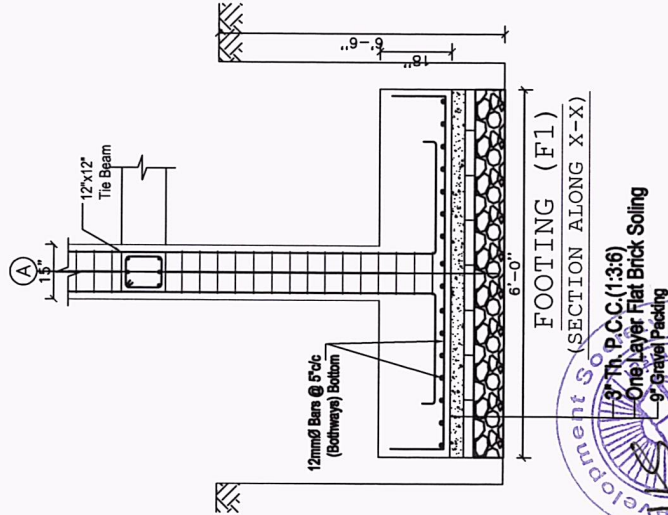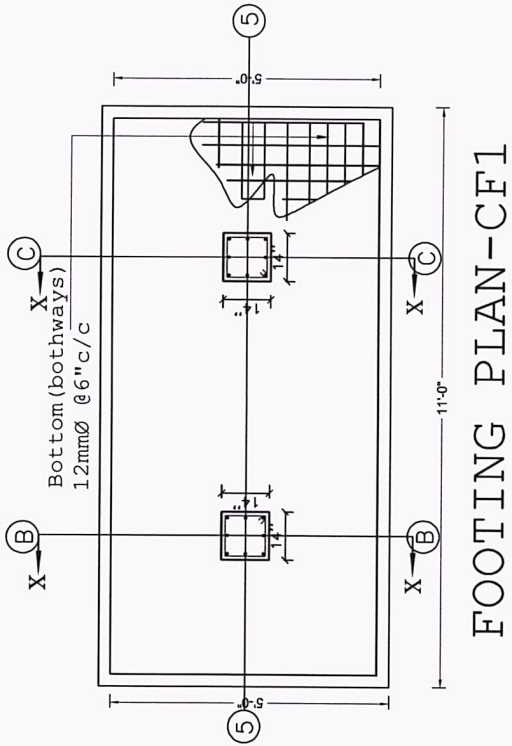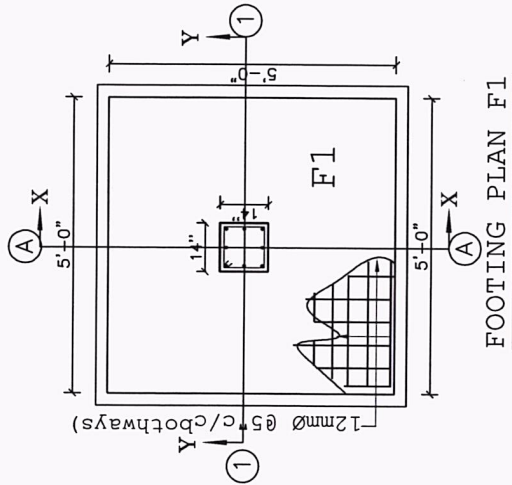

Scale :- 1" = 2'-0"





FOUNDATION DETAIL




FOUNDATION TYPE	LENGTH	BREADTH	DEPTH	REINFORCEMENT	D-Edge	D-Overall
FOUNDATION -F1	5'-0"	5'-0"	6'-6"	12Ø @ 5" C/C BOTH WAYS	0'-8"	1'-4"
FOUNDATION -CF1	11'-0"	5'-0"	6'-6"	12Ø @ 5" C/C BOTH WAYS	0'-8"	1'-4"

SCHEDULE OF COLUMN REINFORCEMENT


COLUMN	SIZE	REINFORCEMENT			COLUMN SECTION	ARRANGEMENT OF STIRRUP
		NUMBER	GND. FLR.	1ST FLR.		
C1	14"x14"	8	4-16Ø + 4-12Ø		8Ø @ 4"C/C 8Ø @ 6"C/C	

BEAM DETAIL:-

TYPE	SIZE	FLOOR	REINFORCEMENT DETAILS					
			REGULAR TOP	REGULAR BOTTOM	ADDITIONAL TOP	ADDITIONAL BOTTOM	SECTION AT SUPPORTS	SECTION AT MID
T.B	10"x12"	PLINTH LEVEL	3-12Ø	3-12Ø	2-16Ø			
F.B.	10"x15"	GROUND FLOOR	3-12Ø	2-16Ø + 1-12Ø	2-16Ø			

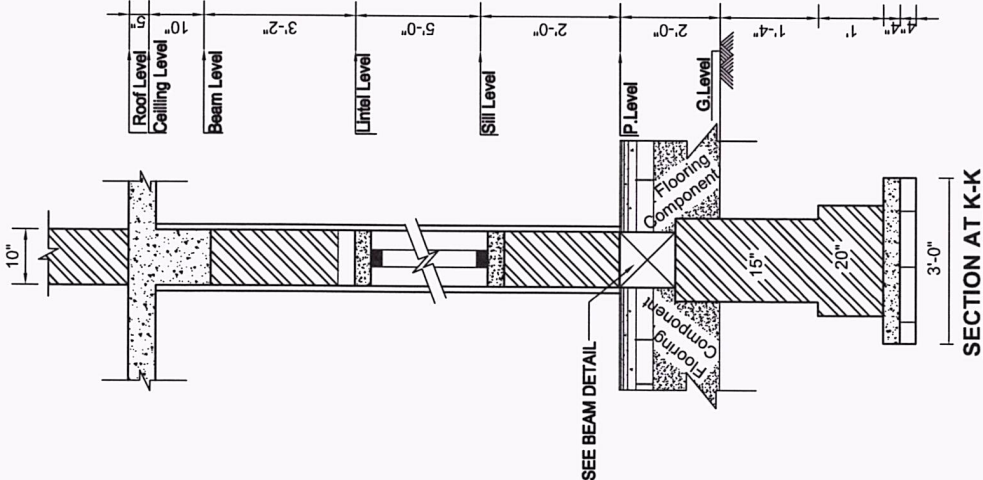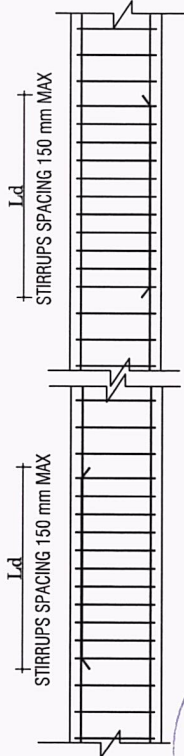


TOE WALL PLAN AT M
Scale - 1"= 20"

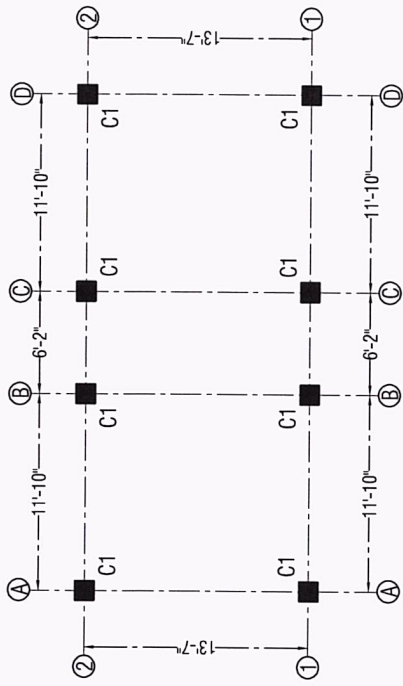


LAYOUT OF COLUMN PLAN

Scale :- 1"=8'-0"

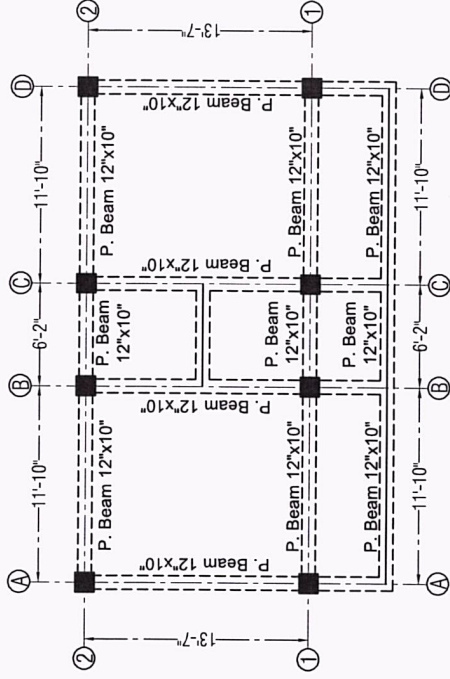


LAYOUT OF PLINTH BEAM PLAN

Scale :- 1"=8'-0"

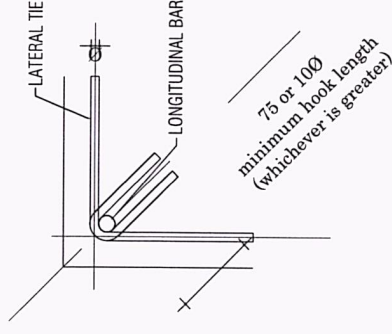


DETAILS A-135° HOOK DETAIL
FOR STIRRUPS & TIES

Scale :- NTS

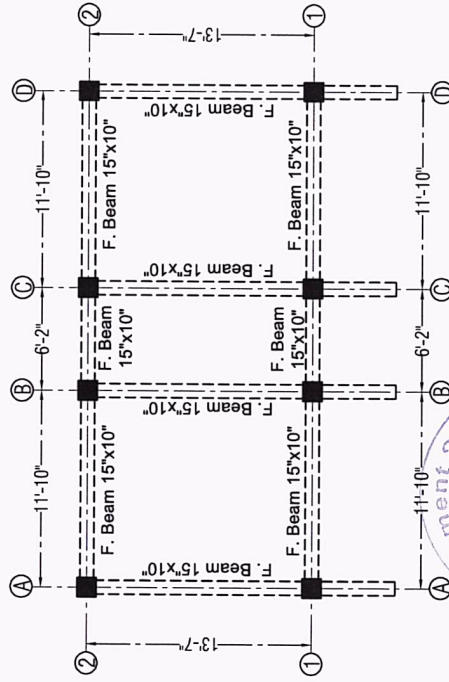


LAYOUT OF FLOOR BEAM PLAN

Scale :- 1"=8'-0"

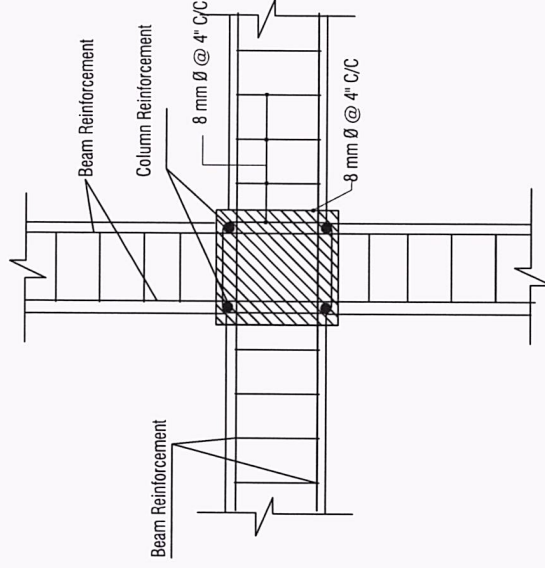


SECTIONAL PLAN OF BEAM COLUMN
JOINT DETAILS

Scale :- 1"=2'-0"

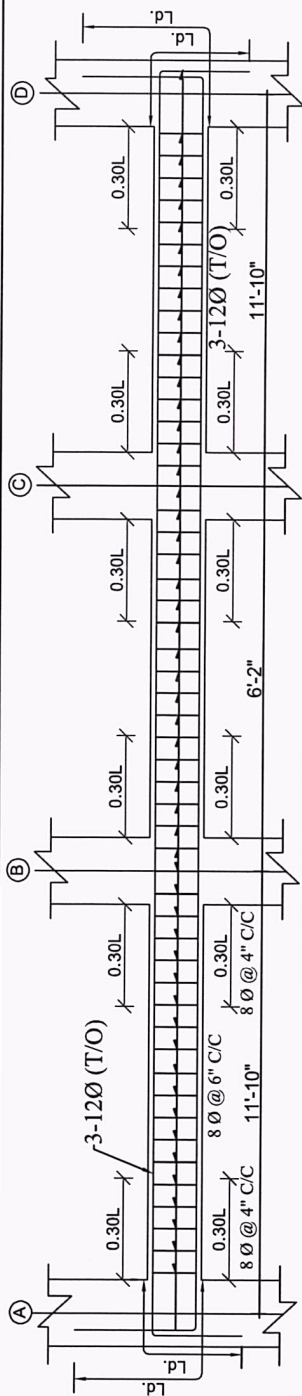


REBAR ALONG PLINTH BEAM AT GRID -1-1

Scale - 1"= 20"

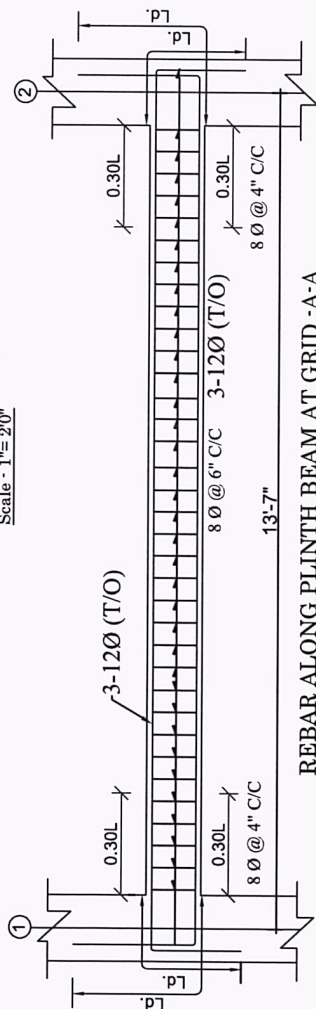


REBAR ALONG PLINTH BEAM AT GRID -A-A

Scale - 1"= 20"

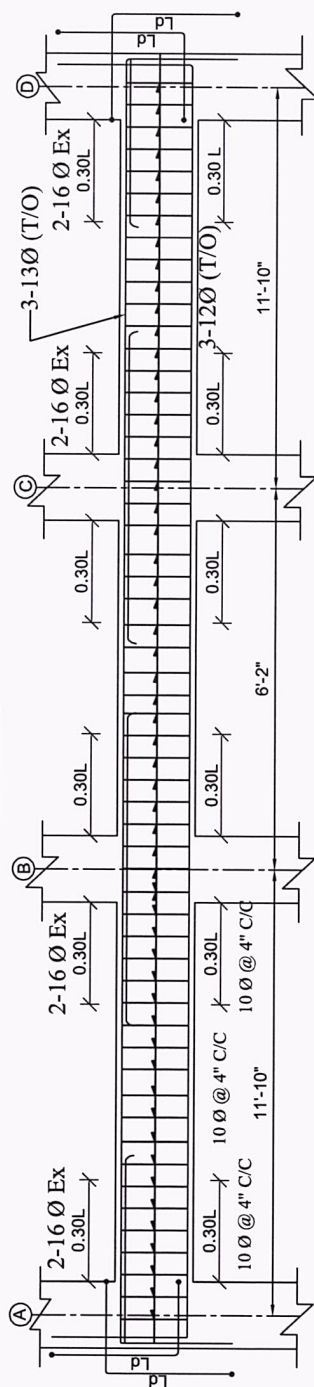

TYPICAL SECTION OF FLOOR BEAM AT GRID 1-1


Scale - 1"= 20"

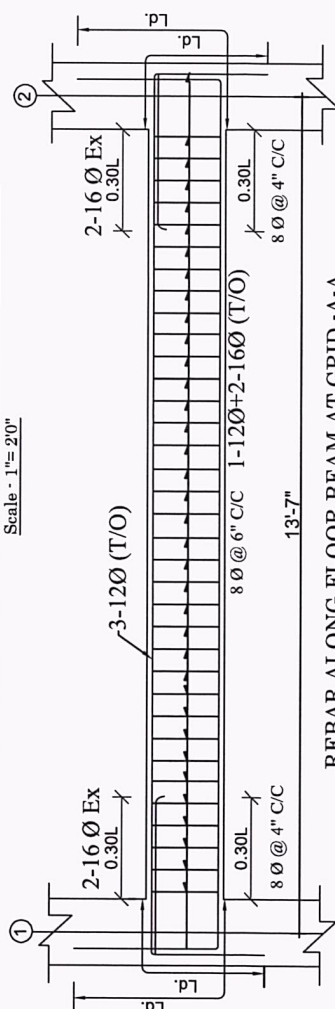

REBAR ALONG FLOOR BEAM AT GRID -A-A


Scale - 1"= 20"



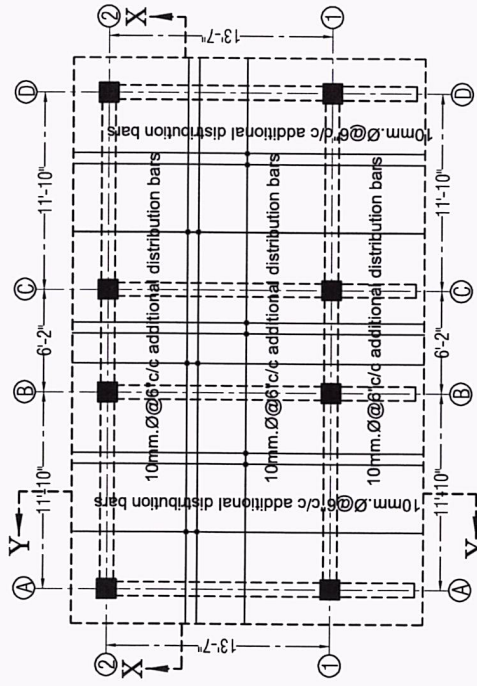


BOTTOM REINFORCEMENT DETAILS OF SLAB

Scale :- 1"=8'-0"

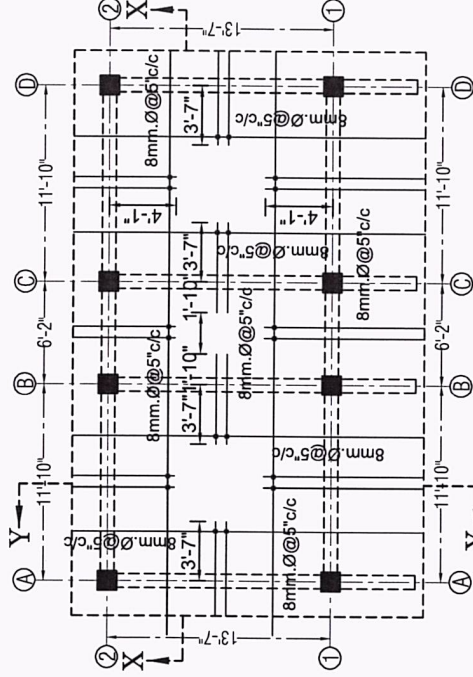


TOP REINFORCEMENT DETAILS OF SLAB

Scale :- 1"=8'-0"

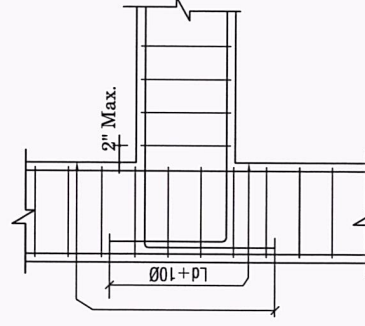

TYPICAL BAR DETAIL AT CORNER

Scale :- 1"=2'-0"

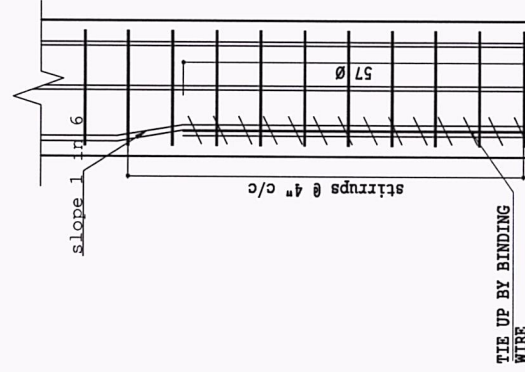

LAPPING DETAIL






(SCALE: 1"=1'-0")

LAPPING NOTES FOR BEAM

LAP LENGTH SHALL NOT BE LESS THAN BAR DEVELOPMENT LENGTH IN TENSION
NO MORE THAN 50% OF THE BARS SHALL BE SPLICED AT ONE SECTION.
LAPP SPLICED SHALL NOT BE PROVIDED :-

1. WITHIN A JOINT
2. WITHIN A DISTANCE FROM 2d FROM JOINT FACE
3. WITHIN A QUARTER LENGTH OF THE MEMBER

LAPPING FOR BEAM BAR

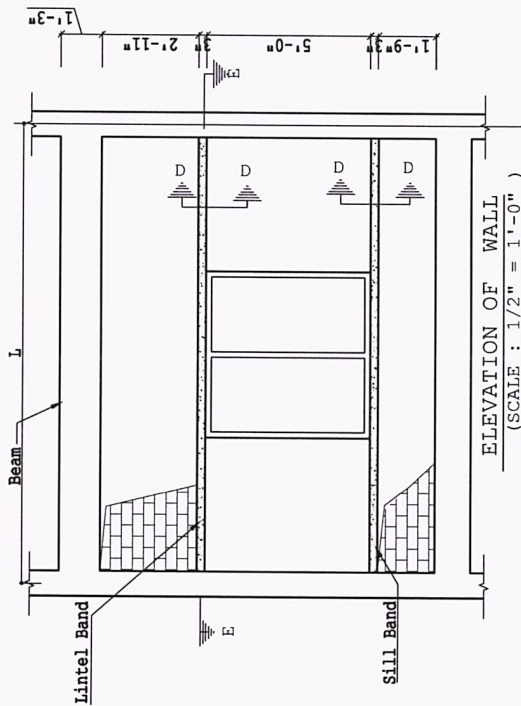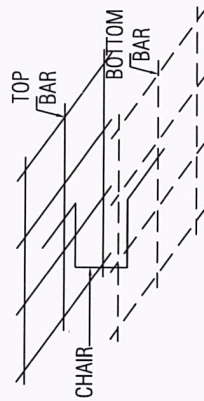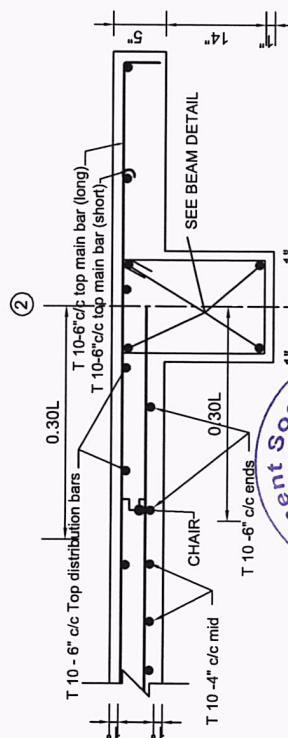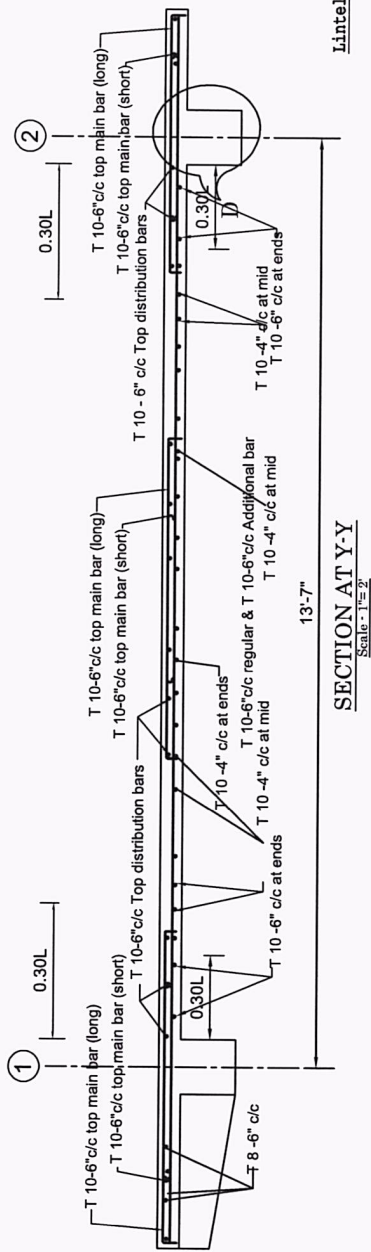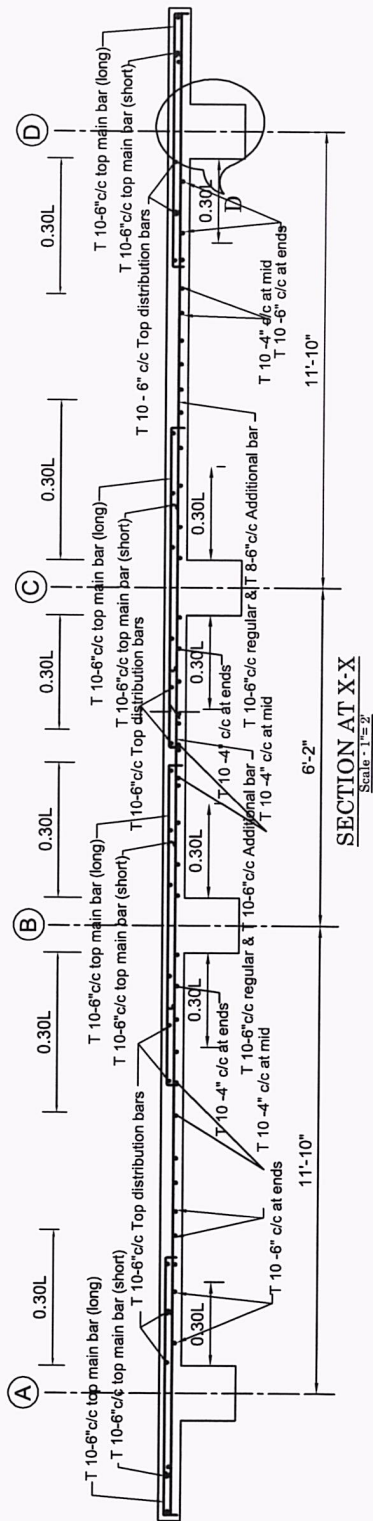

SECTION AT D-D
(SCALE: 1"=1'-0")

